

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number
WO 2005/013333 A2

(51) International Patent Classification⁷: **H01L**

Henry [US/US]; 700 Island Way, #1004, Clearwater, FL 33767 (US).

(21) International Application Number:
PCT/US2004/024688

(74) Agent: **MOXON, George, W., II**; Roetzel & Andress, 222 South Main Street, Akron, OH 44308 (US).

(22) International Filing Date: 30 July 2004 (30.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/492,173 1 August 2003 (01.08.2003) US

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **LEXCO, INC.** [US/US]; 163 N. Hayden Pkwy, Hudson, OH 44236 (US).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **LEX, David** [US/US]; 254 Castle Blvd., Akron, OH 44313 (US). **LEX,**


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]


(54) Title: **MONOLITH FOR USE IN REGENERATIVE OXIDIZER SYSTEMS**

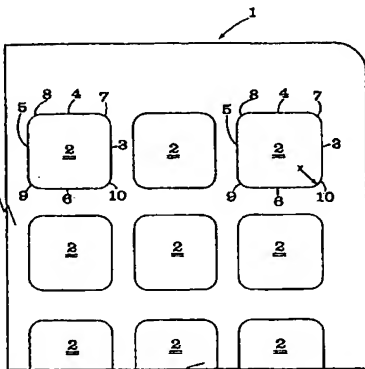

(57) Abstract: A ceramic packing element comprising a monolith structure having a generally block shape and having plurality of equally spaced parallel openings therein extending the length of the block where the openings have generally straight sides and corners which are rounded. The corners are substantially radiused to produce the rounded corners. For example, where the openings in the element are between 1.8 and 6.5 mm, the radius will be between 0.3 and 1.8 mm. The block element will have between 20 to 60 cells by 20 to 60 cells totaling between 400 to 3600 cell elements.



X



WO 2005/013333 A2



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*